


Assembly & Installation Instructions

Large Ringo Pendant 139744D

A484

Page 1 of 4

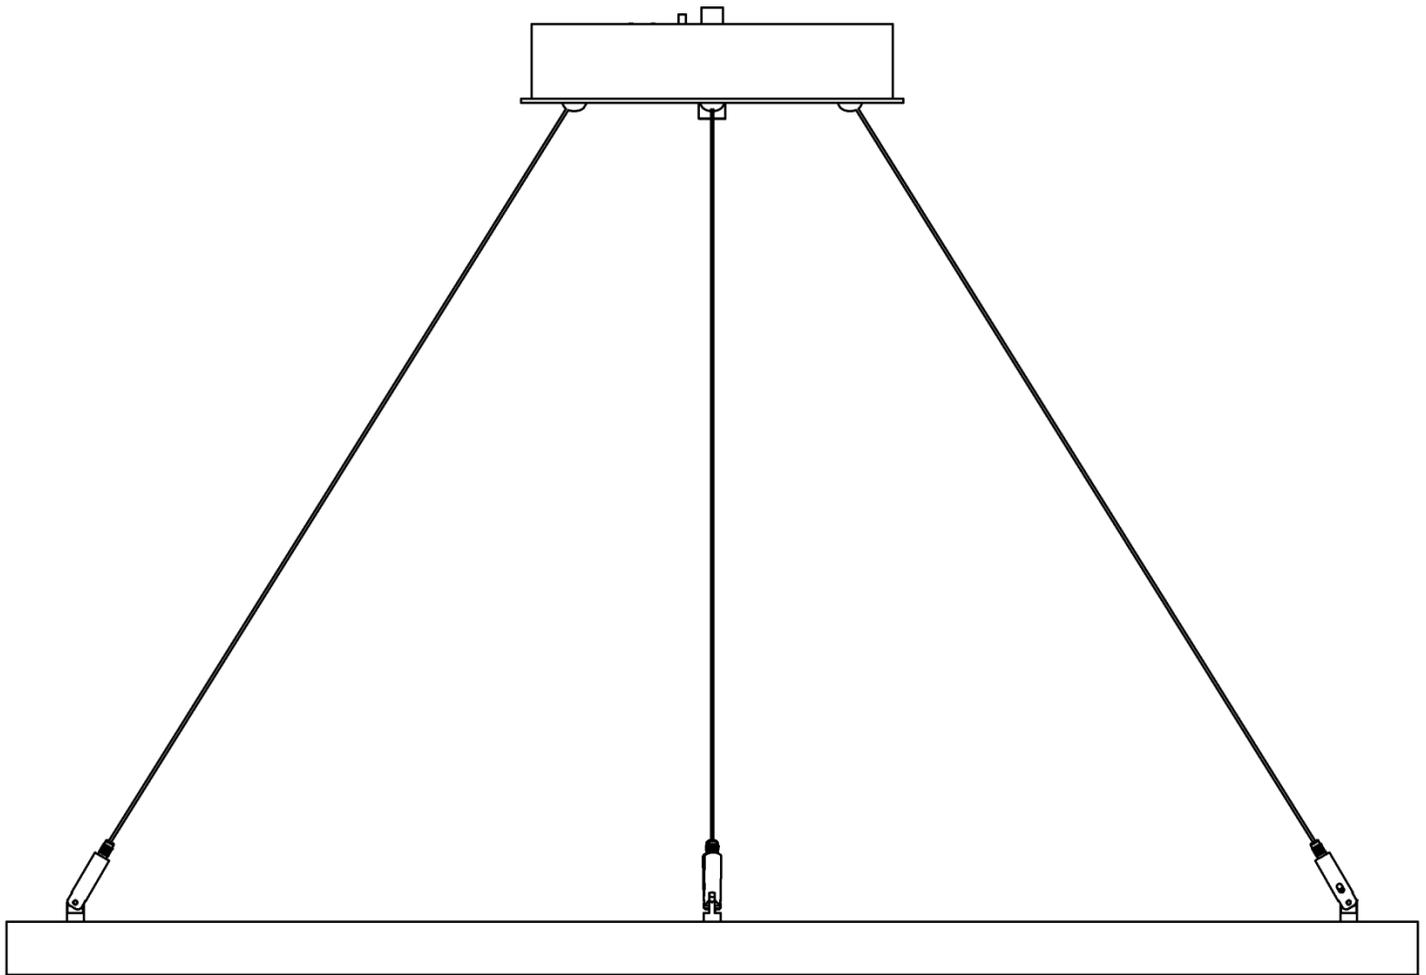

Assembly & Installation Instructions

Large Ringo Pendant 139744D

A484

Page 2 of 4

COMPONENT LIST

- A. Canopy
- B. Canopy Cover Plate
- C. Cap
- D. Supply/Support Cable (4)
- E. Nut
- F. Nipple
- G. Fixture
- H. Gripper (4)
- I. Gripper Lock (4)

Assembly & Installation Instructions

Large Ringo Pendant 139744D

A484

Page 3 of 4

CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE. We recommend installation by a licensed electrician.

This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.*

Caution: Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.

To Install Canopy (Figure 1)

Caution: Be sure power is off at the main breaker box prior to installation.

1. Carefully unpack the fixture from the carton.
2. To attach canopy (A) directly to the junction box: Feed the wires in the electrical box through the hole in the canopy (A) while moving the canopy into position. Using two machine screws (not provided) fasten canopy (A) to the electric box.

Note: A new electric box comes with screws. When replacing a fixture, retain the existing screws for use with the new fixture.

3. Remove nut (E) from stud on canopy cover plate (B). Slide end of safety cable over stud and reattach nut (E). The safety cable also acts as a ground for the canopy cover plate (B)


Caution: Make sure wire connectors are twisted on securely, and no bare wires are exposed

Note: Grey and purple driver wires are not used for this fixture.

4. Using suitable wire connectors (not provided) connect transformer wires to supply wires (white to white and black to black). Connect all ground wires (bare copper or green to bare copper or green) together
5. Install canopy cover plate (B) making sure the (+) and (-) labels on the cover are aligned with the labels on the canopy (A). Secure in place with cap (C).

Caution: Make sure wire connectors are twisted on securely, and no bare wires are exposed

Note: Grey and purple driver wires are not used for this fixture.

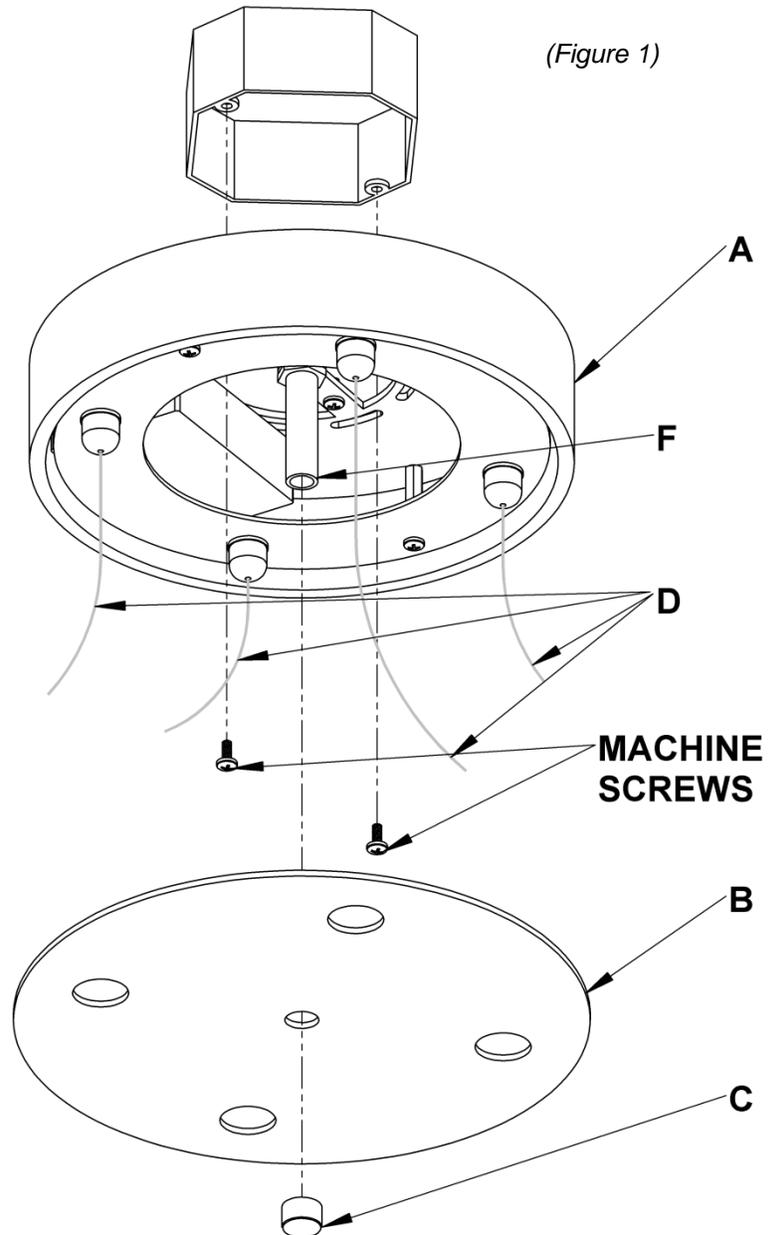

(continued)

Assembly & Installation Instructions

A484

Large Ringo Pendant 139744D

Page 4 of 4

To Assemble Fixture (Figure 2)

1. Align (+) and (-) labels on fixture (G) with (+) and (-) labels on canopy cover plate (B).
2. Remove gripper lock (I) from gripper (H).
3. Slide gripper lock (I) onto support/supply cable (D).
4. Insert support/supply cable (D) through gripper (H) until cable sticks through slot in side of gripper (H).
5. Repeat steps 2-4 with remaining cables (D).
6. Continue pulling cables (D) through grippers (H) until desired fixture height is achieved making sure to keep fixture level.

Note: If fixture (G) needs to be lowered, push down on top of canopy gripper (H) to release cable.

7. Once desired height of the fixture (G) is achieved, thread gripper lock (I) back onto gripper (H) and cut off the excess cable (D) as close to the gripper (H) as possible.

Caution: Once excess cable is cut, fixture cannot be lowered.

Caution: Be sure that no piece of the support cable is touching the fixture

8. Restore electricity at main breaker.

If you need further assistance, or find that you are missing any parts, please contact the dealer from which you purchased this product. We hope you enjoy your fixture!

* Hubbardton Forge will not be liable for injury or damage caused by improper installation, lamping or use of this fixture.