


# ASSEMBLY & INSTALLATION INSTRUCTIONS

Olympus Horizontal Pendant 131608

A944

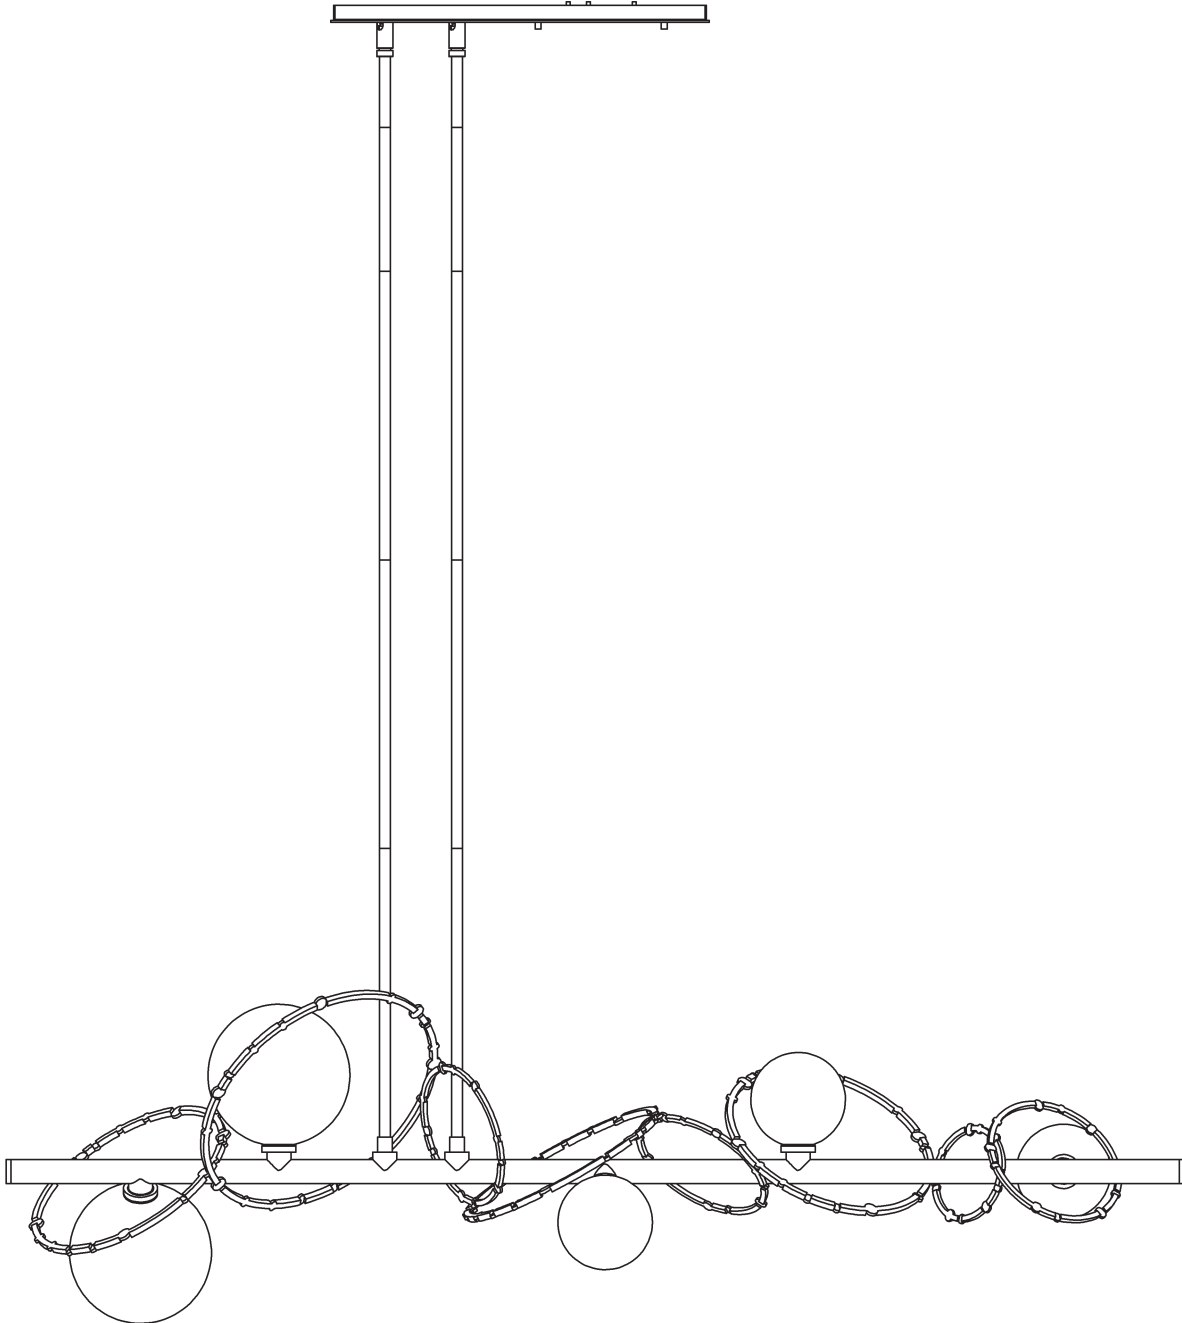

## Component Parts

<b>A</b>	<b>Fixture</b>
<b>B</b>	<b>Crossbar</b>
<b>C</b>	<b>Nut (2)</b>
<b>D</b>	<b>Lock Washer (2)</b>
<b>E</b>	<b>Swivel (2)</b>
<b>F</b>	<b>3" Fixture Pipe (2)</b>
<b>G</b>	<b>6" Fixture Pipe (2)</b>
<b>H</b>	<b>12" Fixture Pipe (6)</b>
<b>I</b>	<b>Stem Nipples (10)</b>
<b>J</b>	<b>Ceiling Bracket</b>
<b>K</b>	<b>Threaded Stud (2)</b>
<b>L</b>	<b>Canopy</b>
<b>M</b>	<b>Ground Screw</b>
<b>N</b>	<b>#8 Screw (2)</b>
<b>O</b>	<b>Barrel Knob (2)</b>
<b>P</b>	<b>Anchor</b>
<b>Q</b>	<b>#10 Screw (2)</b>
<b>R</b>	<b>Socket (4)</b>
<b>S</b>	<b>Bulb (not included)</b>
<b>T</b>	<b>Large Glass (2)</b>
<b>U</b>	<b>Small Glass (3)</b>



# ASSEMBLY & INSTALLATION INSTRUCTIONS

A944

Olympus Horizontal Pendant 131608

**CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE.** We recommend installation by a licensed electrician. This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.\*

Caution: Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.

Please Note: After installation extra hardware and accessories are possible due to our kits are used on multiple products and options.

## To Install Fixture (Figure 1) on following page

**CAUTION: BE SURE POWER IS OFF AT THE MAIN BREAKER BOX PRIOR TO INSTALLATION.**

- Carefully unpack fixture (A) from the carton.
- Locate fixture pipes (F,G,H), fixture (A) and stem nipples (I). Stem nipples (I) can be found in the kit bag.
- Provided are multiple fixture pipes in three different lengths. Choose the combination that will achieve the overall height desired. Refer to the table below to determine the pipes required to reach the desired overall height. Once you have determined the components necessary, feed the wires that exit fixture (A) through the individual components. Wires will slip easier through loose components than through pipes and nipples that are pre-assembled. Once wires are run, apply thread locking compound to all the connection points and assemble the pipes and nipples.

		Overall Height of Fixture												
		18.8	21.8	24.8	27.8	30.8	33.8	36.8	39.8	42.8	45.8	48.8	51.8	54.8
# of Pipes Required	3" Pipe (I)	1		1		1		1		1		1		1
	6" Pipe (J)	1			1	1			1	1			1	1
	12" Pipe (K)		1	1	1	1	2	2	2	2	3	3	3	3

**NOTE: APPLICATION OF THE THREAD LOCKING COMPOUND IS NECESSARY TO PREVENT THE PIPE FROM LOOSENING DURING REGULAR MAINTENANCE AND CLEANING OF THE FIXTURE. BE CERTAIN TO APPLY THE COMPOUND.**

- Slip wires from the fixture (A) through assembled swivel (E) and thread swivel into fixture pipe.
- Repeat repeat steps 3 & 4 for second set of pipes.
- Ensure that slots on swivels (E) are aligned as shown in figure 1.
- Thread wires from swivel (E) through appropriate holes in canopy (L) and slide canopy (L) down over fixture pipes until it rests on the top of fixture (A).
- Using two machine screws (not provided) fasten crossbar (B) to the electric box using outer oval slots to orient fixture to desired hanging position.
- Center ceiling bracket (J) over the crossbar (B). Align the holes in the ceiling bracket (J) with two tapped holes in the crossbar (B) making sure to orient bracket in desired position. With a pencil, mark the location of anchor positions on the ceiling. Set ceiling bracket aside.
- Drill 1/4" holes in the locations marked on the ceiling. Place the tapered end of the anchor (Q) into the hole and gently tap flush to the ceiling using a light weight hammer.
- Thread wires from swivel (E) through appropriate holes in ceiling bracket (J) and secure against swivels with lock washers (D) and nuts (C).
- Follow instructions on following page to continue install.

# ASSEMBLY & INSTALLATION INSTRUCTIONS

A944

Olympus Horizontal Pendant 131608


13. Raise fixture (A) to ceiling aligning the holes in ceiling bracket (J) with the holes in crossbar (B) and anchors (P).
14. Attach ceiling bracket (J) to crossbar (B) using #8 screws (N) found in the kit bag.
15. Using #10 screws (R), screw the ceiling bracket (J) to the ceiling. Be careful not to over-tighten or strip the anchors (Q).
16. Using suitable wire connectors (not provided) connect fixture wires to supply wires (white to white and black to black). Attach a pigtail lead to the crossbar (B) using the ground screw (M) on the crossbar. Hold canopy (L) close to ceiling and connect all ground wires (bare copper or green to bare copper or green).

**CAUTION:** MAKE SURE WIRE CONNECTORS ARE TWISTED ON SECURELY, AND NO BARE WIRE IS EXPOSED.

17. Push canopy (L) over threaded studs (K) and firmly against the ceiling and secure canopy to threaded studs (K) using barrel knobs (O).

**CAUTION:** BE SURE NO WIRES ARE PINCHED BETWEEN CANOPY (L) AND THE CEILING.

18. Follow instructions on the following page to install bulbs and glass.

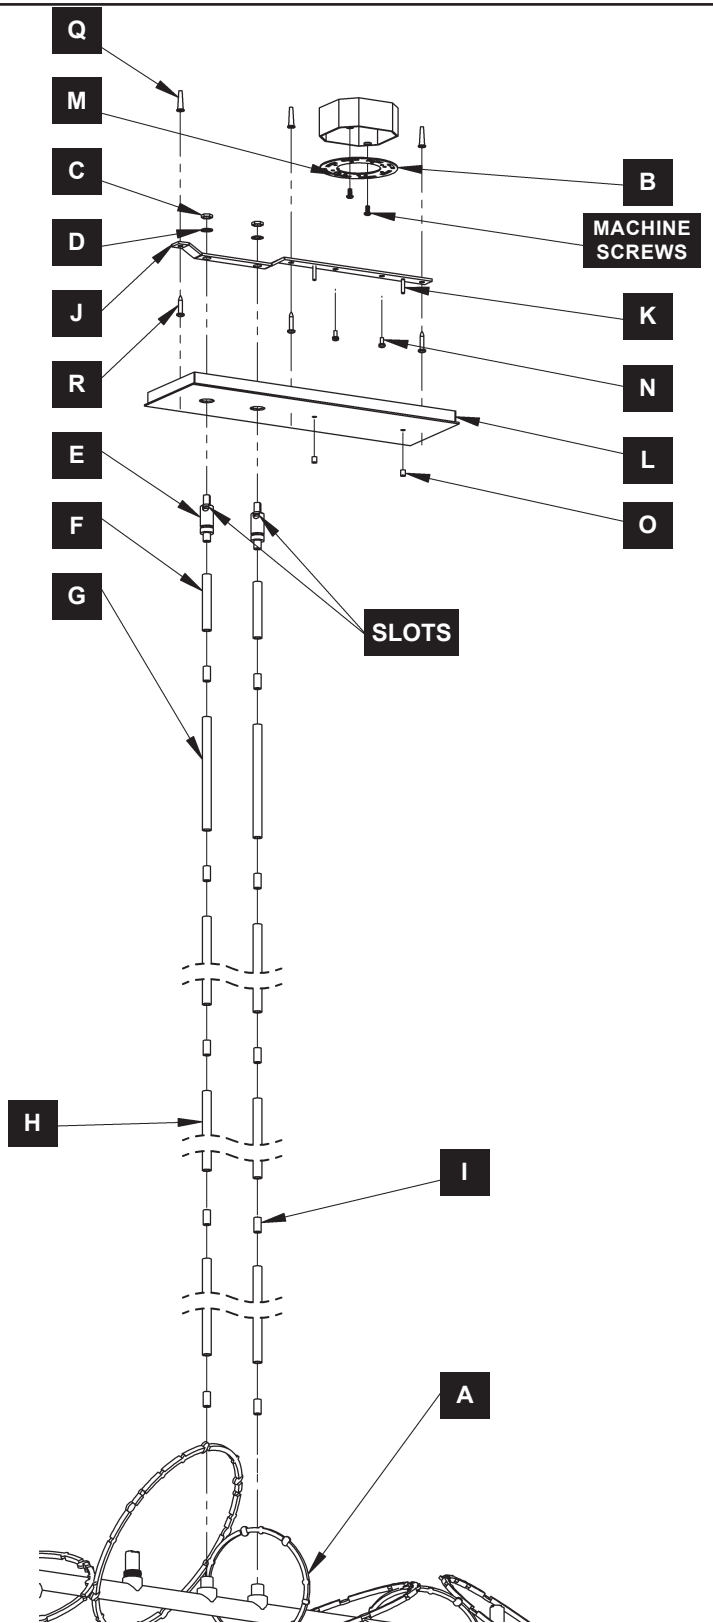


(Figure 1)

Olympus Horizontal Pendant 131608

## To Install Glass (Figure 2)

1. Locate large and small glass assemblies (T & U).
2. Refer to picture on first page of instruction for small (U) and large (T) glass placement.
3. Install bulb (S) (not provided) into socket (R).
4. Thread glass assembly (T or U) onto socket (R).
5. Repeat for remaining bulbs (S) and glass (T or U).
6. Restore electricity at main breaker.

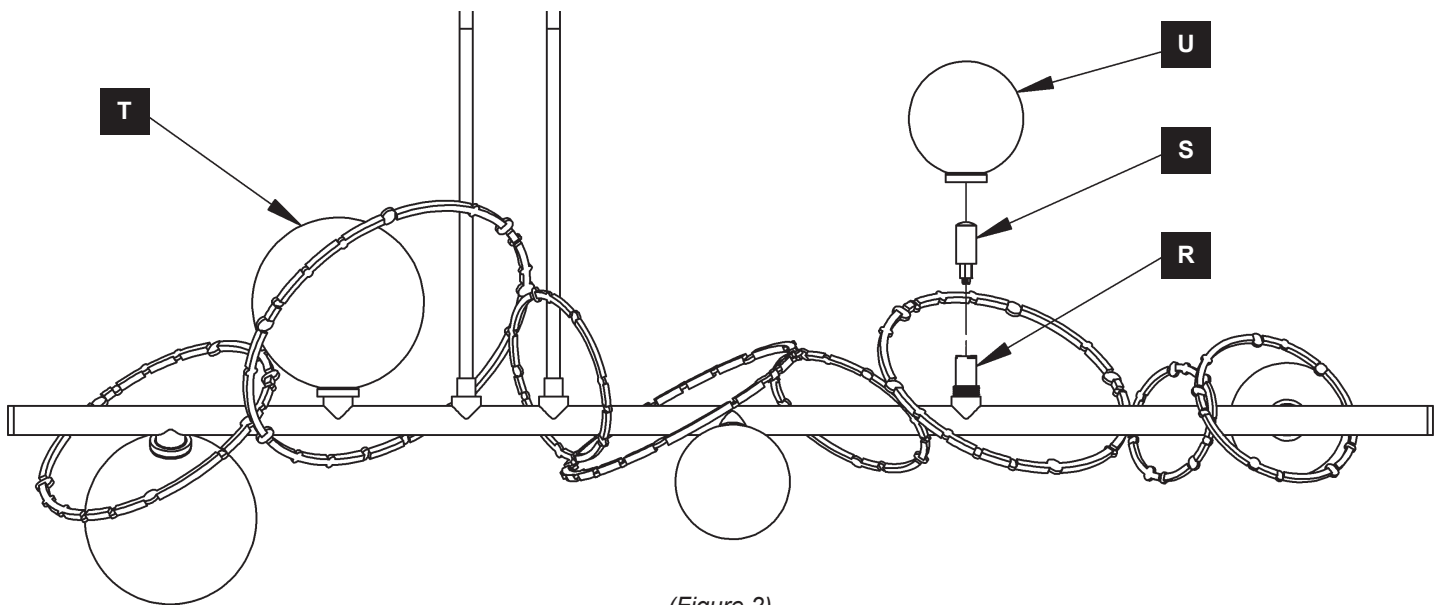

If you need further assistance, or find that you are missing any parts, please contact the dealer from which you purchased this product. We hope you enjoy your fixture!

*\* Hubbardton Forge will not be liable for injury or damage caused by improper installation, lamping or use of this fixture.*