

Assembly & Installation Instructions

A153

New Town Eight-Light Chandelier 10-3280 & 10-3285

Page 1 of 2

CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE. We recommend installation by a licensed electrician.

This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.*

Caution: Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.


To Install to Ceiling (Figure 1)

Component Parts

- A Fixture
- B Stud (2)
- C Ceiling Bracket
- D Canopy Loop (2)
- E Crossbar
- F Lag Screw (4)
- G Hex Nut (2)
- H Canopy
- I Loop Collar (2)
- J Chain (2)
- K Fixture Loop

Caution: Be sure power is off at the main breaker box prior to installation

1. Attach one end of the chains to the fixture loops (K). Lace the wire through every other link of the chain (J) to the end.
2. Remove loop collar (I) from canopy loop (D).
3. Slide loop collar (I) and canopy (H) over canopy loop (D).
4. Fasten the chains to the canopy loops (D) and slip wires through the canopy loop (D). Make sure to provide enough slack in the wire to ensure weight of fixture is supported by the chain.
5. Using four lag screws (F) attach crossbar (E) to a structural member in the ceiling, centering the crossbar over the outlet box. We've supplied lag screws with your fixture; however, different materials and/or construction methods may require different fasteners. If in doubt, contact a qualified electrician. Do not attach crossbar directly to outlet box.
6. Raise fixture to ceiling allowing loop collar (I) and canopy (H) to rest against chain (J), align studs (B) in crossbar (E) with holes in ceiling bracket (C).
7. Thread hex nut (G) onto studs (B) and tighten.
8. Using suitable wire connectors (not provided) connect fixture wires to supply (white to white and black to black, and bare copper to bare copper or green supply). Push wires back into outlet box.
Caution: Make sure wire connectors are twisted on securely, and no bare wire is exposed.
9. Raise canopy (H) to the ceiling and secure with loop collar (I) to canopy loop (D).

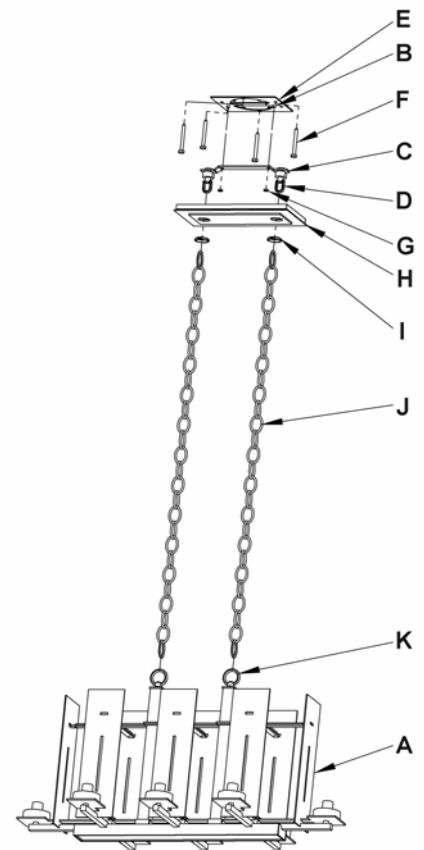

(Figure 1)

(continued)

Assembly & Installation Instructions

New Town Eight-Light Chandelier 10-3280 & 10-3285

A153


Page 2 of 2

To Install Glass (Figure 2)

Component Parts

- A Fixture
- L Screw (8)
- M Glass Ring (8)
- N Glass (8)

1. Install light bulbs (*not provided*).
2. Slip glass ring (M) over glass (N) making sure the counter sunk side is facing up. Install glass (N) aligning glass ring (M) hole with threaded hole in fixture (A).
3. Install screw (L) to attach glass ring (M) to fixture (A).
4. Repeat steps two & three until all eight glass pieces are installed.
5. Restore electricity at the main breaker.

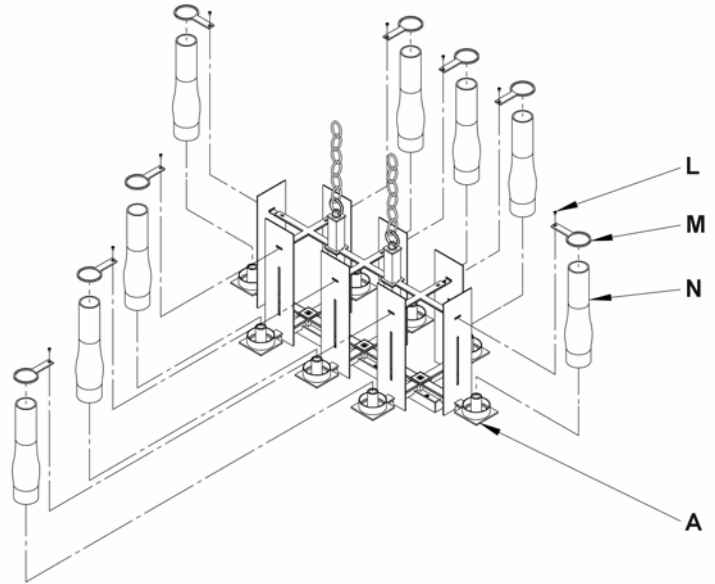

(Figure 2)

If you need further assistance, or find that you are missing any parts, please contact the dealer from which you purchased this product. We hope you enjoy your fixture!

* Hubbardton Forge will not be liable for injury or damage caused by improper installation, lamping or use of this fixture.