

Installation Instructions

A364

Double Cirque Chandelier 104205

Page 1 of 1

CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE. We recommend installation by a licensed electrician. This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.*

Caution: Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.

To Complete Fixture Assembly (Figures 1 & 2)

Component Parts

A Ground Screw	F Canopy Ring
B Crossbar	G Canopy Loop
C Lock Nut	H Fixture Loop
D Nipple	I Chain
E Canopy	


CAUTION: BE SURE POWER IS OFF AT THE MAIN BREAKER BOX PRIOR TO INSTALLATION.

1. Carefully unpack the fixture from the carton.
2. Using two machine screws (not provided), fasten the cross bar (B) to the electric box (see illustration).

Note: A new electric box comes with screws. When replacing a fixture, retain the existing screws for use with the new fixture.

3. Adjust the length of threaded nipple (D) in crossbar (B) so that canopy ring (F) will hold canopy (E) against the ceiling with no threads showing for best appearance. When the correct adjustment is established, tighten lock nut (C) against crossbar (B) to hold the adjustment.
4. Attach one end of the chain (I) to the fixture loop (H). Lace the wire through every other link of the chain (I) to the end. Slip wires and chain (I) through the collars and canopy (F, G & E). Fasten the chain (I) to the canopy loop (G), and then slip wires through the nipple (D), into the electric box. Make sure to provide enough slack in the wire to ensure weight of fixture is supported by the chain (I).
5. Using suitable wire connectors (not provided) connect fixture wires to supply wires (white to ribbed side of the fixture's cord, black to smooth side). Run a pigtail lead from crossbar ground screw (A) to the junction box and connect all ground wires (bare copper or green to bare copper or green).

CAUTION: MAKE SURE WIRE CONNECTORS ARE TWISTED ON SECURELY, AND NO BARE WIRE IS EXPOSED.

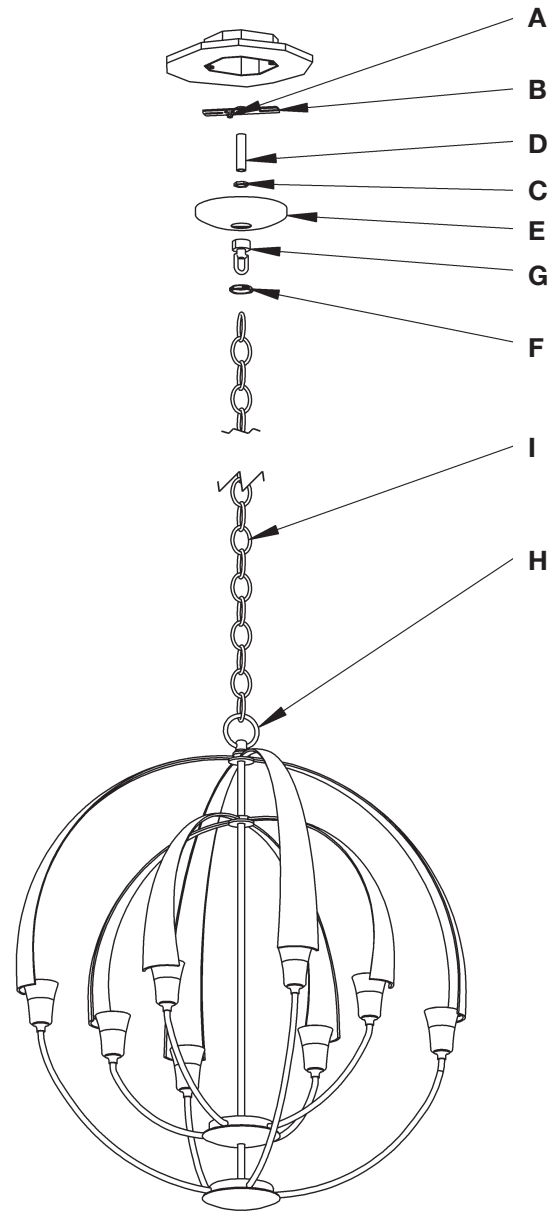

(Figure 1)

(Continued)

If you need further assistance, or find that you are missing any parts, please contact the dealer from which you purchased this product. We hope you enjoy your fixture!

* Hubbardton Forge will not be liable for injury or damage caused by improper installation, lamping or use of this fixture.

Installation Instructions

A364

Double Cirque Chandelier 104205

Page 2 of 2

CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE. We recommend installation by a licensed electrician. This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.*

Caution: Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.

6. Raise canopy (E) to the ceiling and secure canopy ring (F) to canopy loop (G).
7. Install light bulbs (not included).
8. Restore electricity at main breaker.

If you need further assistance, or find that you are missing any parts, please contact the dealer from which you purchased this product. We hope you enjoy your fixture!

**Hubbardton Forge will not be liable for injury or damage caused by improper installation, lamping or use of this fixture.*