

# Assembly & Installation Instructions

**A206**

Ondrian Pendant 13-6305 & 13-6305F

Page 1 of 2

**CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE. We recommend installation by a licensed electrician.**

This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.\*

**Caution:** Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.


## To Complete Assembly (Figures 1 & 2)

### Component Parts


A Hex Head Nipple (2)	H Clutch (2)
B Crossbar	I Set Screw (2)
C Threaded Stud (2)	J Lock Washer (2)
D Canopy	K Fixture Pipe (2)
E Barrel Knobs (2)	L Ground Screw
F Canopy Pipe (2)	M Cupped Washer
G Plastic Clutch Sleeve (2)	

**Caution: Be sure power is off at the main breaker box prior to installation.**

1. Unscrew the clutch (H) from the canopy pipe (F); slide it across the wires and onto the fixture pipe (K). Follow this with the plastic clutch sleeve (G), oriented so the tapered end of the clutch sleeve nests in the clutch.
2. Slide the canopy pipes (F) as far as necessary to give you the total length of the fixture which you desire. Be careful not to scratch the pipe surfaces and to pull excess wire up through the canopy pipe (F). Screw clutch (H) onto canopy pipe (F). There must be a minimum 1-1/2" of inner pipe inside the outer pipe. Hand-tighten the clutch to temporarily hold this adjustment. The clutch is not securely fastened at this point; do not depend on it to hold the fixture. **Important:** To ensure full connection strength, be sure the tapered end of the plastic clutch sleeve is oriented toward the clutch when assembled and securely tighten set screw (Figure 2).
3. Slide canopy (D) over canopy pipes (F) being careful not to scratch finish. Slide down until the canopy rests against clutch (H).
4. Thread studs (C) through appropriate holes in crossbar (B) to match holes in canopy (D).
5. Attach crossbar (B) to both canopy pipes (F) using hex head nipple (A) and lock washer (J).
6. Using two machine screws (not provided), fasten the crossbar (B) to the electric box. **Note:** A new electric box comes with screws. When replacing a fixture, retain the existing screws for use with the new fixture.
7. Using suitable wire connectors (not provided) connect fixture wires to supply (white to white and black to black). Connect all ground wires to green ground screw (L) and cupped washer (M). **Caution:** Make sure wire connectors are twisted on securely, and no bare wire is exposed.

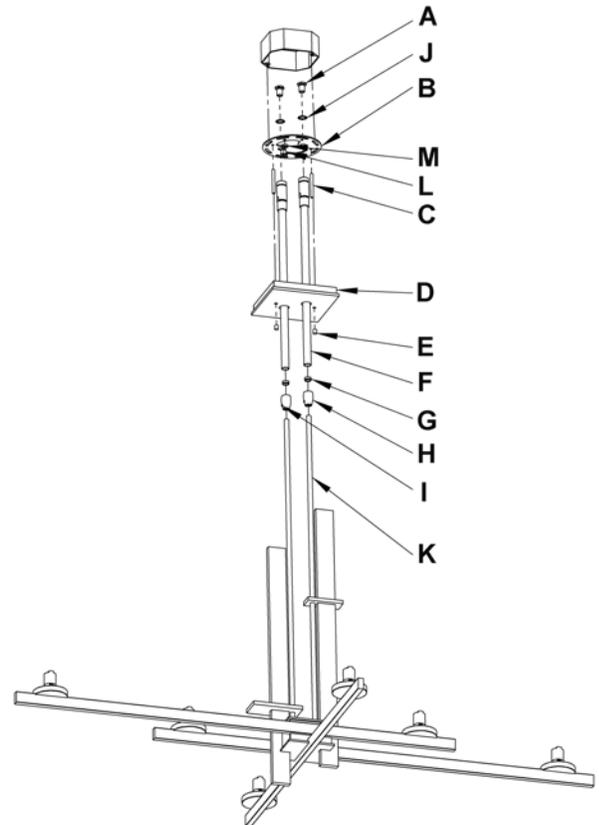

(Figure 1)

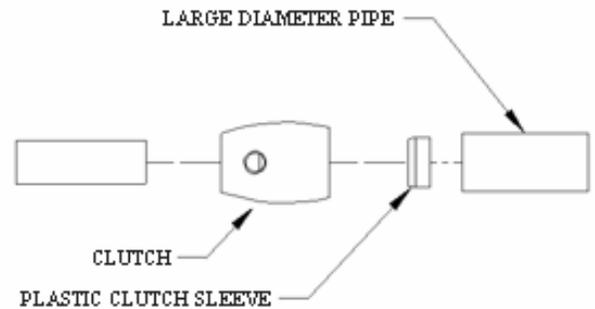

(Figure 2)

(continued)

# Assembly & Installation Instructions


- Slide canopy (D) over threaded studs (C) and push firmly to ceiling, making sure that no wires are pinched between fixture canopy and ceiling. Fasten with barrel knobs (E). Be sure studs are fully seated in the barrel knobs.
- Once the fixture is fastened to the ceiling, tighten the set screw (I) in clutch (H) firmly with hex wrench provided. Only after the set screw (I) is tight should you install the lower assembly.
- Refer instructions below and install glass/shade for option that was purchased.

## To Install Glass with G9 Option (Figure 3)

### Component Parts

- N Socket (6)
- O Bulb (Included) (6)
- P Glass (6)
- Q Spacer (6)
- R Retaining Ring (6)
- S Socket Tool

- Remove retaining ring (R) and spacer (Q) from socket (N). *Retaining Rings and spacers are shipped installed.*
- Install light bulb (O). Be careful not to touch bulb with bare hands; oil from the hands will dramatically reduce bulb life.
- Slip glass (P) over socket (N).
- Slip spacer (Q) over socket (N) so it rests on glass (P).
- Thread retaining ring (R) onto socket (N) using provided socket tool (S). *Be careful not to over tighten.*
- Restore electricity at main breaker.

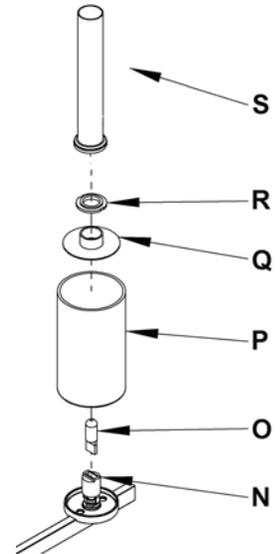


(Figure 3)

## To Install Glass with GU24 Option (Figure 4)

### Component Parts

- N Socket (6)
- O Bulb (Included) (6)
- P Glass (6)
- R Retaining Ring (6)
- S Socket Tool
- T Washer

- Remove retaining ring (R) from socket (N). *Retaining Rings are shipped installed.*
- Slip glass (P) over socket (N).
- Slip washer (T) onto socket (N) so it rests on the bottom of glass (P).
- Thread retaining ring (R) onto socket (N) using provided socket tool (S) provided until it rests on the washer (T). *Do not over tighten.*
- Install light bulb (O).
- Restore electricity at main breaker.

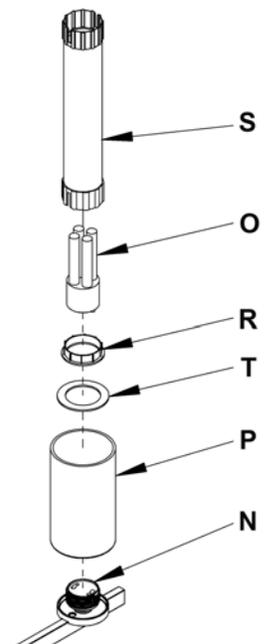

(Figure 4)

*If you need further assistance, or find that you are missing any parts, please contact the dealer from which you purchased this product. We hope you enjoy your fixture!*

\* Hubbardton Forge will not be liable for injury or damage caused by improper installation, lamping or use of this fixture.