

Installation Instructions

A192

For Meridian Chain-Hung Fixture 36-5610 & 36-5610F

Page 1 of 2

CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE. We recommend installation by a licensed electrician.

This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.*

Caution: Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.


To Install Fixture (Figure 1)

Component Parts

A	Lock Nut	H	Canopy
B	Crossbar	I	Canopy Loop
C	Cupped Washer	J	Cover Plate
D	Ground Screw	K	Knurl Ball (2)
E	Threaded Stud (2)	L	Chain
F	Nipple	M	Fixture Loop
G	Wood Screws (4)	N	Fixture Top

Caution: Be sure power is off at the main breaker box prior to installation

1. Carefully unpack the fixture from the carton.
2. Thread studs (E) through appropriate holes in crossbar (B) to match holes in canopy (H).
3. Thread the nipple (F) into the crossbar (B) and secure with lock nut (A).
4. Thread canopy loop (I) onto nipple (F).
5. Attach one end of the chain (L) to the fixture loop (M). Lace the wire through every other link of the chain (L) to the end.
6. Slide cover plate (J) and canopy (H) over chain (L) until they rest against fixture top (N).
7. Fasten the chain (L) to the canopy loop (I) and slip wires through the canopy loop (I) and nipple (F). Make sure to provide enough slack in the wire to ensure weight of fixture is supported by the chain.
8. Raise fixture to ceiling and using at least two wood screws (G) attach cross bar (B) to a structural member in the ceiling, centering the crossbar over the outlet box. We've supplied wood screws with your fixture; however, different materials and/or construction methods may require different fasteners. If in doubt, contact a qualified electrician. Do not attach crossbar directly to outlet box.
9. Using suitable wire connectors (not provided) connect fixture wires to supply wires (white to ribbed side of the fixture cord, black to smooth side). Connect all ground wires to cupped washer (C) and ground screw (D). **Caution:** Make sure wire connectors are twisted on securely, and no bare wire is exposed.
10. Slide canopy (H) and cover plate (J) over threaded studs (E) and push firmly to ceiling, making sure that no wires are pinched between fixture canopy and ceiling. Fasten with knurled balls (K). Be sure studs (E) are fully seated in the knurled balls (K).
11. Install glass (see instructions on next page).

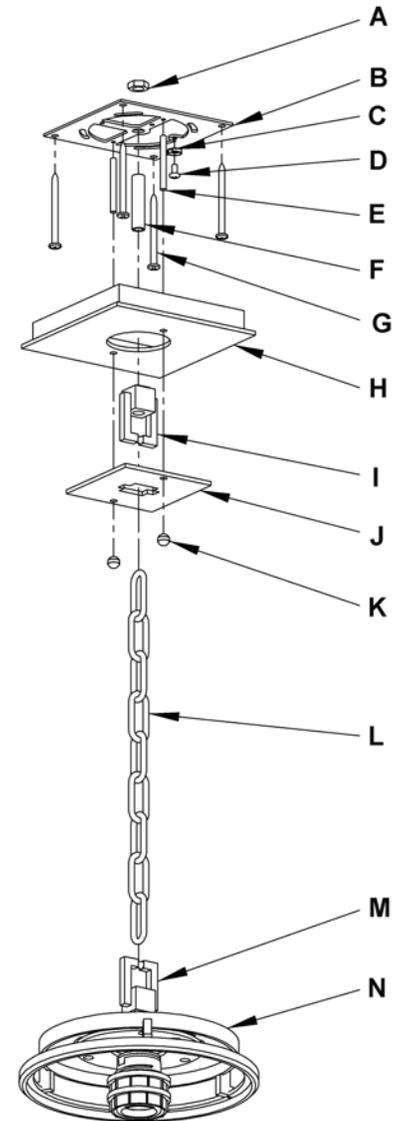

(Figure 1)

(continued)

Installation Instructions

For Meridian Chain-Hung Fixture 36-5610 & 36-5610F

A192


Page 2 of 2

To Install Outer Glass (Figure 2)

Component Parts

- O Screws (3)
- P Retaining Ring (2)
- Q Socket
- R Outer Glass (*larger diameter glass*)
- S Spider Assembly

1. Remove glass retaining rings (P) and put aside and save for later use.
2. Unthread screws (O) that are shipped installed in threaded bosses on underside of fixture next to socket (Q). Loosen screws until there are only a couple threads engaged with the threaded bosses.
3. Slip outer glass (R) over spider assembly (S).
4. Raise spider assembly (S) with outer glass (R) installed and slip over socket (Q) aligning holes in the top of the spider assembly (S) keyed ring goes over screws (O).
5. Turn spider assembly (S) counter clockwise until it stops. Tighten three screws (O) until snug against the spider assembly. *Be careful not to over tighten.*

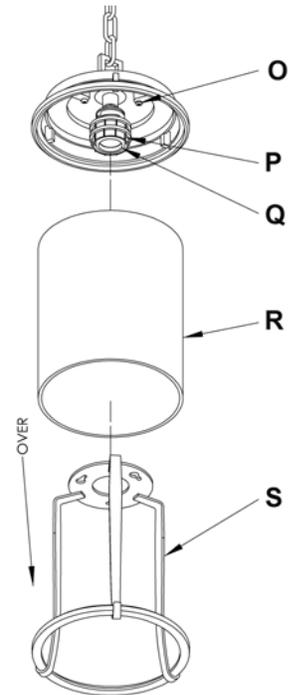


(Figure 2)

To Install Inner Glass (Figure 3)

Component Parts

- P Retaining Ring (2)
- T Inner Glass

1. Slip inner glass (T) over socket.
2. Thread the first retaining ring (P) onto socket until it is against top of the inner glass (T).
3. Thread the second retaining ring (P) onto socket until it is snug against the first retaining ring. *Do not over tighten.*
4. Install light bulb. *"F" version bulb is included.*
5. Restore electricity at main breaker.

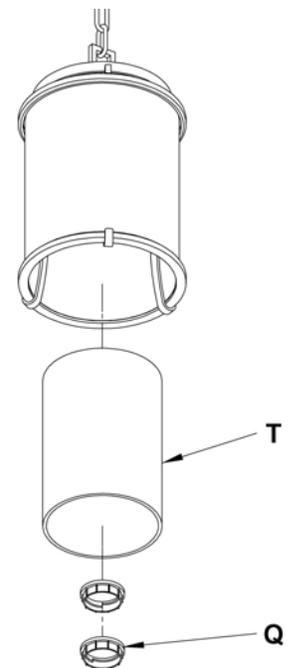

(Figure 3)

If you need further assistance, or find that you are missing any parts, please contact the dealer from which you purchased this product. We hope you enjoy your fixture!

* Hubbardton Forge will not be liable for injury or damage caused by improper installation, lamping or use of this fixture.